j c 7 72 U.S. PT	
	Ш
09/21/00	

Please type a plus sign (+) inside this box → +

PTO/SB/05 (4/98)
Approved for use through 09/30/2000. OMB 0651-0032

Patent and Trademark Office: U.S. DEPARTMENT OF COMMERCE

Under the Paperwork Reduction Act of 1995, no persons are required	to respond to a collection	of information unless it di	splays a valid OMB control num
UTILITY	Attorney Docket No.	500.35453CX1	

UTILITY
PATENT APPLICATION
TRANSMITTAL

First Inventor or Application Identifier Tomonobu SATO

Title SYSTEM FOR TRANSFERRING MULTIMEDIA INFORMATION

Only for new no	onprovisional applications under 37 C.F.R. § 1.53(b)) Expre	ss Mail Label No.	0 5
See MPEP cha	PPLICATION ELEMENTS pter 600 concerning utility patent application contents.	Assistant Commis ADDRESS TO: Box Patent Applic. Washington, DC 2	ation .KS
	ee Transmittal Form (e.g., PTO/SB/17)	5. Microfiche Computer Program	
2. X Spr (pre - D - C - Si - Bi - D - C - Ai 3. X Dra 4. Oath or D - Ai b. X	ecification [Total Pages] ecification [Total Sheets] ecification [Total Pages] ecification [Tota	6. Nucleotide and/or Amino Acid Seque (if applicable, all necessary) a. Computer Readable Readable Computer Readable Computer Readable Computer Readable Co	popy to computer copy) The copies of copies of IDS Citations EP 503) d) to filed in prior application till proper and desired
X Co	NTINUING APPLICATION, check appropriate box, and so continuation Divisional Continuation-in-part (Colication information: Examiner W. Vaughn, Jr. CATION or DIVISIONAL APPS only: The entire disclosure	IP) of prior application No: 08/862,365 Group / Art Unit: 2756	
under Box 4b	, is considered a part of the disclosure of the accompany ne incorporation <u>can only</u> be relied upon when a portion i	ing continuation or divisional application and	is hereby incorporated by
.creation. 11	17. CORRESPONDE		печ аррисацоп раптs.
X Custom	er Number or Bar Code Labe I (Insert Customer No. or Atta	: Or La Correspor	ndence address below
Name			
Address			
City	State	Zip Code	
Country	Telephone	Fax	
Name (P	Print/Type) Hung H. Bui	Registration No. (Attorney/Agent) 4()	415
Simo atum	rant/Type) Hung H. Bui		, 113

Burden Hour Statement: This fold is estimated to take 0.2 hours to complete. Time will vary depending upon the needs of the individual case. Any comments on the amount of time you are required to complete this form should be sent to the Chief Information Officer, Patent and Trademark Office, Washington, DC 20231. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Assistant Commissioner for Patents, Box Patent Application, Washington, DC 20231.

Attachment to PTO/SB/05 (4/98) Utility Patent Application Transmittal

1. - Copy of Assignment from parent application

PTO/SB/17 (12/99)

Approved for use through 09/30/2000 OMB 0651-0032

Patent and Trademark Office U.S. DEPARTMENT OF COMMERCE

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number

FEE TRANSMITTAL for FY 2000		Complete if Known	
		Application Number	NEW
		Filing Date	September 21, 2000
Patent fees are subject to a	nnual revision	First Named Inventor	Tomonobu SATO
Small Entity payments <u>must</u> be supported by a small entity statement, otherwise large entity fees must be paid. See Forms PTO/SB/09-12		Examiner Name	
See 37 CFR §§ 127 a	and 1 28	Group / Art Unit	
TOTAL AMOUNT OF PAYMENT	(\$)690.00	Attorney Docket No.	500.35453CX1

METHOD OF PAYMENT (check one)	FEE CALCULATION (continued)			
1. The Commissioner is hereby authorized to charge and credit any overrous parts to				
•• L∆J indicated fees and credit any overpayments to	Large Entity Small Entity Fee Fee Fee Fee Foo Description			
Deposit Account University 01-2135	Code (\$) Code (\$)	Fee Paid		
Number U1-2133	105 130 205 65 Surcharge - late filing fee or oath	0.00		
Deposit	127 50 227 25 Surcharge - late provisional filing fee or cover sheet	0.00		
Account Name Antonelli, Terry, Stout & Kraus, LLP				
	139 130 139 130 Non-English specification	0.00		
Charge Any Additional Fee Required Under 37 CFR §§ 1 16 and 1 17	147 2,520 147 2,520 For filing a request for reexamination	0 00		
2 Doument Englands	112 920* 112 920* Requesting publication of SIR prior to Examiner action	0.00		
2. ☑ Payment Enclosed: ☐ Check ☐ Money ☑ Other	113 1,840* 113 1,840* Requesting publication of SIR after Examiner action	0.00		
FEE CALCULATION	115 110 215 55 Extension for reply within first month	0 00		
	116 380 216 190 Extension for reply within second month	0 00		
1. BASIC FILING FEE Large Entity Small Entity	117 870 217 435 Extension for reply within third month	0 00		
Fee Fee Fee Fee Description	118 1,360 218 680 Extension for reply within fourth month	0.00		
Code (\$) Code (\$) Fee Paid 101 690 201 345 Utility filing fee [600 00]	128 1,850 228 925 Extension for reply within fifth month	0.00		
106 310 206 155 Design filing fee 690.00	119 300 219 150 Notice of Appeal	0.00		
107 480 207 240 Plant filing fee	120 300 220 150 Filing a bnef in support of an appeal	0 00		
108 690 208 345 Reissue filing fee	121 260 221 130 Request for oral hearing	0 00		
114 150 214 75 Provisional filing fee	138 1,510 138 1,510 Petition to institute a public use proceeding	0 00		
	140 110 240 55 Petition to revive - unavoidable	0 00		
SUBTOTAL (1) (\$) 690.00	141 1,210 241 605 Petition to revive - unintentional	0.00		
2. EXTRA CLAIM FEES Fee from	142 1,210 242 605 Utility issue fee (or reissue)	0.00		
Extra Claims below Fee Paid		0 00		
Total Claims 14 -20** = 0 X = 0 10 10 10 10 10 10 10	144 580 244 290 Plant issue fee	0 00		
Classis	122 130 122 130 Petitions to the Commissioner	0 00		
Multiple Dependent =0	123 50 123 50 Petitions related to provisional applications	0 00		
**or number previously paid, if greater, For Reissues, see below Large Entity Small Entity	126 240 126 240 Submission of Information Disclosure Stmt	0.00		
Fee Fee Fee Fee Description Code (\$) Code (\$)	581 40 581 40 Recording each patent assignment per property (times number of properties)			
103 18 203 9 Claims in excess of 20	146 690 246 345 Filing a submission after final rejection	0.00		
102 78 202 39 Independent claims in excess of 3	(37 ČFR § 1 129(a))	0.00		
104 260 204 130 Multiple dependent claim, if not paid	149 690 249 345 For each additional invention to be examined (37 CFR § 1 129(b))	0.00		
109 78 209 39 ** Reissue independent claims over onginal patent	Other fee (specify)	0.00		
110 18 210 9 ** Reissue claims in excess of 20 and over original patent	Other fee (specify)	0.00		
SUBTOTAL (2) (\$) 0.00 • Reduced by Basic Filing Fee Paid SUBTOTAL (3) (\$) 0.00				
SUBMITTED BY Complete (if applicable)				
Name (Pant/Type) Hung H/Bui / Registration No (Attorney/Agent) 40,415 Telephone (703) 312-6600				
Signature	Date Comb 21			

Information on this form may become public. Credit card information should not be included on this form. Provide credit card information and authorization on PTO-2038.

Burden Hour Statement This form is estimated to take 0.2 hours to complete Time will vary depending upon the needs of the individual case. Any comments on the amount of time you are required to complete this form should be sent to the Chief Information Officer, Patent and Trademark Office, Washington, DC 20231 DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO. Assistant Commissioner for Patents, Washington, DC 20231

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

Applicant: Tomonobu SATO

Serial No.: NEW

Filed: September 21, 2000

For: SYSTEM FOR TRANSFERRING MULTIMEDI

INFORMATION

Group Art Unit: Not assigned

Examiner: Not assigned

PRELIMINARY AMENDMENT

Assistant Commissioner for Patents September 21, 2000 Washington, DC 20231

Sir:

Prior to examination, please amend the above-identified application as follows:

IN THE SPECIFICATION:

Page 1, before line 1: Insert the following:

-- CROSS-REFERENCE TO RELATED APPLICATION

This is a continuation of Application Serial No. 08/862,365, filed May 23, 1997.--

- line 2 Change "The multimedia" to --Multimedia--.
- line 7: Change "picture" to --pictures--.
- line 11: Change "a great deal" to --large
 amounts--.

- line 21: After "server" insert --,--; delete
 "entrusted are".
- Page 2, line 1: Change "great" to --large--.
 - line 2: Change "deal" to --amount--.
 - line 16: Change "a" to --an extended--.
 - line 18: Change "great deal" to --large amount--.
- Page 3, line 1: Change "great" to --large--.
 - line 2: Change "deal"to insert --amount--.
 - line 3: Change "doing" to --performing--;
 - line 5: Change "containing" to --including--.
 - line 10: Change "configured of" to --including--;
 - line 11: Change "which" to --, the--; change "is"
 to --being--.
 - line 14: After "and" insert --to--.
- Page 4, line 6: Change "each" to --the--; change "block" to --blocks--.

- line 7, Delete "basis".
- line 13: Change "receive" to --the receipt--.
- line 14: After "transmission" insert -- of data--.

- line 23: Delete "required to receive".
- line 24: Delete "the result".
- line 25: Delete "in a manner to divide" and
 insert a comma--,--;
- line 27: Delete "to set".
- Page 5, line 1: After "units" insert --being sent--.
 - line 3: Change "when" to --while--; after
 "streams" insert --of data--;
 - line 4: Change "to store" to --concurrent
 storage--; after "display" insert of--; after "the" insert --data--;
 delete "at a time".
 - line 28: After "their" insert --performing--.

- Page 7, line 21, After "26", insert --29--; and
 line 26: Change "concretely," to
 --specifically--.
- Page 8, line 7: Delete "where".

 line 8: After "a" insert --received--; and delete "to be received".
- Page 9, line 13: After "20" insert --, respectively,--.
 line 26: Change "do" to --perform--.
 line 27: Change "block" to --blocks--.
- Page 10, line 7: Change "to" to --for--; change "receive" to --receipt of data--.
 - line 10: After "The" insert --received--; delete
 "for receive".
 - line 11: Change "composed of" to --including--.
 - line 13: Change "is" to --includes--.
 - line 14: Delete "composed".
 - line 25: Change "to store" to --the storage of--.
 - line 26: Change "requests" to--request--.
- Page 11, line 1: Change "is composed of" to --includes--.
 line 6: Change "to store" to --the storage of--.

- line 8: Change "is composed of" to --includes--.
- line 14: Change "respect"to insert --aspect--;
 after "is" insert --the--.
- line 23: Change "firth" to --first--;
- line 26: Delete "is".
- line 27: Change "composed of" to --includes--.
- line 28: Change "is" to --includes--.
- Page 12, line 1: Delete "composed of".
 - line 8: Change "to store" to --the storage of--.
 - line 9: Delete ":".
 - line 11: Change "contained" to --included--.
 - line 15: Change "is composed of a" to --includes--.
 - line 19: Change "is composed of" to --includes--.
- Page 13, line 1: Change "to store" to --the storage of--.
 - line 3: Change "is the" to --has--.
 - line 4: Delete "as".
 - line 5: Change "is composed of" to --includes--.
 - line 12: Change "to store" to --the storage of--.
 - line 16: Change "to store" to --the storage of--.

- Page 15, line 10: Change "Concretely" to --Specifically--.
 - line 17: Change "In a case that" to --When--.
 - line 18: Change "like" to --as in--.
 - line 21: Change "feeding" to --forwarding--.
- Page 17, line 1: Change "checked" to --determined --.
 - line 7: Change "checked" to --determined--.
- Page 18, line 16: Change "operates to update" to --updates--.
 - line 18: Change "Concretely" to --Specifically--.
- Page 21, line 4: Change "operates to" to --performs--.

 - line 6: Change "register" to --registered--.
 - line 12: Change "contained" to --included--.
- Page 22, line 3: Change "operates to update" to --updates--.

line 15: Change "receive" to --receives--.

line 22: Delete "with".

Page 23, line 2: Delete the comma ",".

line 7: Change "operates to set" to --sets--.

line 12: Change "to transmit" to --the
 transmission of--.

line 20: Change "processed" to --processes--.

Page 24, after line 17, insert the following paragraph:

--While the present invention has been described above in conjunction with preferred embodiments, one of ordinary skill in the art would be enabled by this disclosure to make various modifications to these embodiments and still be within the scope and spirit of the invention as defined in the appended claims.--.

add new claims 14-27 as follows:

--14. A process of transferring multimedia information in a multimedia information transfer system which comprises a multimedia server, a client server system coupled to said multimedia server via a network, and a matrix table coupled to said multimedia server for status management, said process comprising the steps of:

Please cancel claims 1-13 without prejudice or disclaimer, and

storing and reproducing, at said multimedia server, data streams of multimedia information;

dividing said multimedia information, at said multimedia server, into N data block (where N is an integer no less than 2), and each of which N data block includes n data units (where n is an integer no less than 1), sequentially transferring said multimedia information divided into N data blocks to said client server of said client server system on a data block basis, and sending a request to transfer said multimedia information divided into N data blocks from said client server system to a proper field of said matrix table;

requesting, at said client server, said multimedia server to divide said multimedia information into N data blocks and to transfer N data blocks of said multimedia information to said client server; and

<u>-</u>16

-21

storing and registering, at said client server, the transferred data blocks of said multimedia information, and providing a visual display of said multimedia information concurrently with the storage and registration of said multimedia information.

- 15. The process as claimed in claim 14, wherein said multimedia server, said client server and said one or more clients correspond to different nodes in said network having network addresses dedicated for communications.
- 16. The process as claimed in claim 14, wherein said matrix table is configured for managing a receiving status and a process request status of said client server system, and wherein said multimedia server sets a request for transferring multimedia information divided into N data blocks from said client server system to a proper field of said matrix table and transfers said multimedia information divided into N data blocks based on said receive status.
- 17. The process as claimed in claim 14, wherein said matrix table includes a transfer status area which indicates whether the transfer of all N data blocks of said multimedia information is complete, and a receive status area which indicates the reception

- of said multimedia information, wherein said transfer and receive status areas are updated each time transfer and reception operations are executed.
 - 18. The process as claimed in claim 14, wherein said multimedia information divided into N data blocks is transferred from said multimedia server to said client server of said client server system independently of the update of said transfer and receive status areas of said matrix table.
 - 19. The process as claimed in claim 14, wherein said multimedia information divided into N data blocks, each of said data blocks includes an address for identifying a subject data block, and each of n data units included in each data block includes a data address.
 - 20. The process as claimed in claim 14, wherein said multimedia information includes image information, and when said image information is transferred from said multimedia server to said client, said client operates to specify the address for identifying said data blocks of said image information stored and the data address of a specific one of said data units for reproducing said image information.

- 1

- 21. The process as claimed in claim 15, wherein said network addresses dedicated for communications includes one network address dedicated for receiving said multimedia information, and another network address dedicated for transmitting said multimedia information.
- 22. A process of transferring multimedia information from a multimedia server to a client server system through a communication network, comprising:

dividing said multimedia information into N data blocks (where N is an integer no less than 2), each of which data block contains n data units (where n is an integer no less than 1), in response to a request by said client server system that said multimedia server transfer said multimedia information divided into N data blocks, each block containing n data units, to said client server system;

transferring the requested data blocks of said multimedia information to said client server system on a data block basis; and

providing a matrix table having a transfer status area which indicates if a transfer operation of all N data blocks of said multimedia information is complete and a receive status area which indicates if a receive operation of all N data blocks of said multimedia information transferred from said client server system is complete, the transfer operation of said multimedia information

- divided into N data blocks being executed based on said status information of said matrix table.
 - 23. The process as claimed in claim 22, wherein said multimedia information divided into N data blocks is transferred from said multimedia server to said client server of said client server system independently of the update of said transfer and receive status areas of said matrix table.
 - 24. The process as claimed in claim 22, wherein said multimedia information divided into N data blocks, each of said data blocks includes an address for identifying a subject data block, and each of n data units included in each data block includes a data address.
 - 25. The process as claimed in claim 22, wherein said multimedia information includes image information, and when said image information is transferred from said multimedia server to said client, said client operates to specify the address for identifying said data blocks of said image information stored and the data address of a specific one of said data units for reproducing said image information.

26. A process of receiving multimedia information from a multimedia server at a client server system containing a client server and a plurality of clients coupled to said client server through a communication network, comprising:

- 1

2

3

7

8

9

10

T T

T2

13 =14

-1

3

4

5

receiving requests from respective ones of said clients for transfer thereto of multimedia information divided into N data block (where N is an integer no less than 2);

receiving said multimedia information divided into N data blocks in a format of data block units, and storing and registering said data blocks in data set areas corresponding respectively to said clients; and

reproducing and providing a visual display of said multimedia information of said stored data block while a next data block of said multimedia information is being received.

27. The process as claimed in claim 26, wherein said multimedia information includes image information, and when said image information is transferred from said multimedia server to said client, said client operates to specify the address for identifying said data blocks of said image information stored and the data address of a specific one of said data units for reproducing said image information.—

REMARKS

By the foregoing, the parent application is identified in the specification of the present continuation and amendments to the specification made in the parent application are brought forward.

Original claims 1-13 are cancelled in favor of new claims 14-27.

To the extent necessary, applicants petition for an extension of time under 37 C.F.R. 1.136. Please charge any shortage in fees due in connection with the filing of this paper, including extension of time fees, to Deposit Account No. 01-2135 of Antonelli, Terry, Stout & Kraus, LLP (referencing Attorney Docket No. 500.35517CX1), and please credit any overpayment of fees to such deposit account.

Respectfully submitted,

ANTONELLI, TERRY, STOUT & KRAUS, LLP

Hung H. /Bui'

Reg. No. 40,415

(703) 312-6600 HHB:rk

SYSTEM FOR TRANSFERRING MULTIMEDIA INFORMATION

BACKGROUND OF THE INVENTION

The present invention relates to a system for transferring multimedia information. The multimedia information is a generic term for several kinds of digital information coexisting in one information media, those digital information containing digital moving picture, digital still picture, digital text data, and digital audio data. More particularly, the present invention relates to the multimedia information transfer system which is suitable to transferring data from a multimedia server for generating a great deal of multimedia information having streams with high bit rates to a server and a client coupled in a client server system (termed CSS) through a multimedia information network represented as a CATV network or an internet.

In general, the CSS used for business is arranged so that part of work to be processed by a server of the CSS is given to a multimedia server such as an outsourcing center and the processed result is given back to the CSS through a network.

The multimedia server to which entrusted are part or all of the functions about a project, a setup, and a promotion of an information processing system used for

business in an enterprise is required to process a great deal of data streams with high bit rates in order to make good use of the multimedia information for backing up the processing of the CSS. Hence, the multimedia server is generally arranged by the leased hardware, a supercomputer (super parallel machine), a mainframe, a general-purpose server machine, a configuration of standard computers interconnected with one another (distributed architecture), or the like.

This kind of technology is described in "Technical Trend Toward Video Server Served as Core of VOD" of "Business Communication" November 1994, issued by Business Communication, Ltd., for example.

When transferring data between different kinds of information processing systems coupled through a communication network, a waiting time for access to the communication network is a significant problem. In particular, when transferring a great deal of data such as multimedia information, the waiting time for access and the transfer time are bottlenecks with regards to efficiency of the transfer system.

The technology described in the aforementioned publication has difficulty in overcoming the bottleneck in connection with the network and in quickly and efficiently transferring data between the multimedia server and a plurality of CSS servers and between the CSS server and a plurality of clients. This difficulty makes it impossible for a client for using the data transferred thereto to

20

25

sufficiently meet the requirements of receiving a great deal of data streams with high bit rates in real time and doing reproducing processes of the multimedia information represented as image data, those reproducing processes containing a fast feed, a stop, and a reverse like reproduction of a video disk, for example.

SUMMARY OF THE INVENTION

It is an object of the present invention to provide a system for transferring multimedia information in a system configured of a multimedia server, CSS servers, and clients which system is arranged to simplify transmitting processes between the multimedia server and the CSS server and receiving processes between the CSS server and the client and solve a bottleneck in connection with a network between the CSS server and a plurality of clients for the purpose of keeping the data transfer quick and efficient.

According to the present invention, a multimedia information transfer system includes a multimedia server and a client server system coupled with the multimedia server through a network so that the multimedia server transfers data to a server and clients of the client server system, the multimedia server having means for storing and reproducing data streams of the multimedia information, the client having means for requesting the multimedia server to output data and storing the transferred data and means for displaying the data concurrently when storing the data.

15

20

According to an aspect of the present invention, the multimedia server operates to divide the multimedia information into N data blocks (N is an integer of 2 or more), each of which contains n data units (n is an integer of 1 or more), and sequentially transfer the data units to the server of the client server system on each data block basis. Then, the client server system operates to transmit the data block containing n data units to the client for requesting the server to output the data.

Further, according to another aspect of the present invention, each network node of the multimedia server and the server and the clients of the client server system has network addresses dedicated for receive and transmission. The multimedia server and the server of the client server system, which are served as transmitting the multimedia information, have their own matrix tables each for managing a receiving status and a process request status on the receiving side and operate to set the request from the receiving side to a field of the matrix and transfer the data based on the status.

According to another aspect of the present invention, the client for requesting the process is just required to receive at the address defined on the receiving side the multimedia information, which is the result processed by the multimedia server in a manner to divide the data into N data blocks and transfer each group of n data units in each data block, and to set a group of n data

units to the defined address. Further, the client provides a function of displaying the streams of the multimedia information concurrently when storing the streams. The client enables to store and display the streams at a time so that the client, by itself, can control a fast feed, a stop, a reverse, and a play in real time.

managing a process requesting status from the side for requesting the process and a receive status for the

10 processed result data for each service. When the side for requesting the process operates to set the process requesting status and the receive status to the matrix table of the multimedia server, the matrix table reads these statuses in sequence and sets the statuses to the

15 proper fields for the matrix table. Hence, the multimedia server for providing the service is capable of transmitting the processed result data for the services of the CSS server and the clients as viewing the status of the matrix table independently of the update of the matrix table.

Further, according to another aspect of the present invention, as mentioned above, the data transfer is executed between the CSS server and the client. Further, the status management of the matrix table and the transmission of the processed result data are allowed to be executed by the device for providing the multimedia server and the CSS server with the services. Hence, the multimedia server, the CSS server, and the client are capable of doing their processes independently of one

another and the two former servers can meet the request from the client and transfer the processed result data.

BRIEF DESCRIPTION OF THE DRAWINGS

These and other objects, features, and advantages

of the present invention will become more apparent upon a
reading of the following detailed description and drawings,
in which:

Fig. 1 is a block diagram showing an arrangement of a system for transferring multimedia information

10 according to an embodiment of the present invention;

Fig. 2 is a view showing a format of a received data status for a client;

Fig. 3 is a view showing a format of a received data set for a client;

Fig. 4 is a view showing a format of a table for each type of process requests for a CSS server;

Fig. 5 is a view showing a format of a matrix table for managing a client status for a CSS server;

Fig. 6 is a view showing a format of a received 20 data status for a CSS server;

Fig. 7 is a view showing a format of a transmission and receive data set for a CSS server;

Fig. 8 is a view showing a format of a transmission data set for a multimedia server;

25 Fig. 9 is a view showing a format of a matrix table for managing a CSS status for a multimedia server;

Fig. 10 is a view showing a list of objects to be served for a CSS server;

Fig. 11 is a view showing a format of objects to be served for a multimedia server;

Fig. 12 is a flowchart (part 1) showing a processing operation of a system for transferring multimedia information according to an embodiment of the present invention; and

Fig. 13 is a flowchart (part 2) to be combined with the flowchart of Fig. 12, showing a processing operation of a system for transferring multimedia information according to an embodiment of the present invention.

DESCRIPTION OF THE PREFERRED EMBODIMENTS

Hereafter, the description will be oriented to a system for transferring multimedia information according to an embodiment of the present invention.

In Fig. 1, a numeral 1 denotes a matrix table for managing a CSS status. A numeral 2 denotes a multimedia

20 server. A numeral 3 denotes a disk unit for storing a data set to be transmitted. Numerals 4, 9, 18, 23, 26 and 32 denote LAN adapters provided with network addresses dedicated for transmission. Numerals 5, 8, 17, 22, 25, 28 and 31 denote LAN adapters provided with network addresses dedicated for receive. A numeral 6 denotes a communication network, concretely, a wide area network (WAN) which is larger in scale than the LAN. Numerals 7, 36, and 37

denote interface devices coupled through the LAN. Numerals 10 and 24 denote CSS servers. A numeral 11 denotes a harddisk where a data set to be received or transmitted is registered. Numerals 12, 16 and 21 denote statuses for received data. A numeral 13 denotes a matrix table for managing a client status. Numerals 14, 19, 27 and 30 denote clients. Numerals 15 and 20 denote harddisks where a data set to be received is registered. A numeral 38 denotes a display unit coupled to each client.

Moreover, the network addresses dedicated for transmission of the LAN adaptors 4, 9, 18, 23, 26, 29 and 32 may be made to be identical with the network addresses dedicated for receive of the LAN adaptors 5, 8, 17, 22, 25, 28 and 31. That is, one LAN adaptor having a single network address may have both of the transmitting and receiving functions.

The system according to an embodiment of the invention, as shown in Fig. 1, includes devices on the multimedia server side for backing up the CSS and a plurality of devices on the CSS side coupled through the network 6 such as the WAN and LAN devices 37, 7 and 36.

The devices on the multimedia server side includes the multimedia server 2 for backing up the CSS, the matrix table 1 for managing the statuses of the processes requested by the CSS side coupled to this server 2 and of the processed result data, a disk device 3 for storing a data set of the processed result to be

- 9 -

5

transmitted to the CSS side, a service list 34 where the CSS's to be served are registered at network addresses dedicated for the outputs, and the LAN adaptors 4 and 5 coupled to the LAN device 37.

One of the devices on the CSS side is arranged to have the CSS server 10 and the clients 14 and 19 coupled through the LAN adaptors 8, 9, 17, 18, 22, and 23 and the LAN device 7. The CSS server 10 is coupled to the disk device 11 for storing a data set of the processed result 10 received from the multimedia server 2 and another data set to be transmitted to the client, a received data status 12, a table for each type of processed request, and the service list 33. The clients 14 and 19 are coupled to the disk devices 15 and 20 for storing the data sets of the processed result received from the multimedia server 2 and the received data statuses 16 and 21. The CSS server 24 and the clients 27 and 30 on the CSS side have the same arrangement as the foregoing devices on the CSS side.

In turn, the description will be oriented to the formats of the tables, the lists, the statuses and the like 20 coupled to the foregoing multimedia server 2, the CSS server 10, and the clients 14 and 19, respectively, with reference to the appended drawings.

The received data statuses 16 and 21 coupled to the clients 14 and 19 are referenced and updated when the 25 client requests the CSS server to do a process and receive the data block of the processed result. As shown in Fig. 2, the status 16 or 21 is composed of network addresses 40 to 43 dedicated for input and output of the CSS server and the subject client, a process request date 44, a process request time 45, a process request ID 46, a status update flag 47, and receive flags 48 to 50 for the first to the N-th data blocks (N is an integer of 2 or more).

The network addresses 40 to 43 may use a single common network address to transmission and receive in place of the network addresses dedicated for transmission and receive.

The data set for receive registered in the harddisk 15 or 20 has a format composed of header information 51 and the first to the N-th data blocks 52 to 54 as shown in Fig. 3. The header information 51 is composed of network addresses 55 to 58 dedicated for inputs and outputs of the CSS server and the subject client, the process request date 59, the process request time 60, and the process request ID 61, which format is the same as that described with reference to Fig. 2.

Each data block includes n (n is an integer of 1 or more) data units 200 and a header 201 at the head of the data. The header 201 contains a data block number and a data unit number stored as address information.

The table for each type of process request 35 coupled to the CSS server 10, as shown in Fig. 4, enables to store m (m is an integer of 1 or more) pieces of information 62 to 65 for each type of process requests.

Each piece of information for each type of process request

is composed of a process request ID 66 of a client, a backup processing flag 67, and a maximum value of a service time of the CSS server.

The matrix table 13 for managing a client status

5 coupled with the CSS server 10, as shown in Fig. 5, enables
to store m pieces of status information 69 to 72 for the
process requests given by the clients. Each status
information is composed of network addresses 73 to 76
dedicated for inputs and outputs of the CSS server and the

10 clients, which are similar to the network addresses
described with reference to Fig. 2, a process request date
77, a process request time 78, a process request ID 79, and
receive flags 81 to 83 for the first to the N-th data
blocks. The different respect of Fig. 5 from Fig. 2 is

15 provision of a transfer completion flag 80 in place of a
status update flag.

The received data status 12 coupled to the CSS server 10, as shown in Fig. 6, is composed of network addresses 84 to 89 dedicated for inputs and outputs of the multimedia server, the CSS server, and the clients, a process request date 90, a process request time 91, a process request ID 92, a status update flag 92, and receive flags 94 to 96 for the firth to the N-th data blocks.

The data set for transmission and receive,

registered in the disk device 11 coupled to the CSS server

10, has such a format as shown in Fig. 7. The format is

composed of a header information 97 and the first to the N
th data blocks 98 to 100. The header information 97 is

25

composed of network addresses 101 to 106 dedicated for inputs and outputs of the multimedia server, the CSS server, and the clients, which are the same network addresses as those described with reference to Fig. 6, a process request date 107, a process request time 108, and a process request ID 109.

The service list 33 coupled to the CSS server 10, as shown in Fig. 10, enables to store n (n is an integer number.) network addresses 180 to 183 dedicated for outputs of the clients served by the subject CSS server 10.

The data set for transmission contained in the disk device 3, which stores the data set of the processed result to be transmitted to the CSS side coupled to the multimedia server 2, has such a format as shown in Fig. 8. The format is composed of a header information 110 and the first to the N-th data blocks 111 to 113. The header information 110 is the same as that described with reference to Fig. 7. That is, the header information 110 is composed of network addresses 114 to 119 dedicated for inputs and outputs of the multimedia server, the CSS server and the clients, a process request date 120, a process

Each data block includes n (n is an integer of 1 or more) data units 300. Further, a header 301 is included at the head of the data. The header 301 saves a data block number and a data unit number as address information.

request time 121, and a process request ID 122.

The matrix table 1 for managing the CSS status, which table is coupled to the multimedia server 2, enables

to store m pieces of status information 123 to 126 for the process requests given by the CSS servers as shown in Fig. 9. Each status information is the similar composition to that as described with reference to Fig. 5. That is, each status information is composed of network addresses 127 to 132 dedicated for inputs and outputs of the CSS servers, the clients and the multimedia server, a process request date 133, a process request time 134, a process request ID 135, a transfer completion flag 136, and receive flags 137 to 139.

The service list coupled to the CSS server side, as shown in Fig. 10, enables to store n network addresses 180 to 183 dedicated for outputs of the clients served by the subject CSS server.

The service list 34 coupled to the multimedia server 2, as shown in Fig. 11, enables to store n network addresses 184 to 187 dedicated for outputs of the CSS servers served by the subject multimedia server 2.

As set forth above, according to an embodiment of
the invention, the system configured of the multimedia
server, the CSS server and the clients is arranged to
simplify a transmitting process between the multimedia
server and the CSS server and the receiving process between
the CSS server and the clients and solve the bottleneck in
networking between the multimedia server and CSS servers
and between the CSS server and the clients for the purpose
of quickly and efficiently transferring the data.

2.0

In turn, the description will be oriented to the operation of transferring the multimedia information in the system according to the foregoing embodiment of the invention with reference to Figs. 12 and 13. In this embodiment of the invention, the clients, the CSS server and the multimedia server are operated independently of one another. Further, the multimedia server operates to back up the process executed by the CSS server. In response to the request given from the CSS server, the multimedia server operated by the multimedia information generated by the multimedia server itself to the CSS server. Further, the CSS server operates to transfer the received multimedia information to the client for requesting the multimedia information.

At first, the processing on the client side will be described.

- (1) Now, assume that a process request is issued for transferring the multimedia information to the multimedia server 2. In response to the request, the client 14 operates to set a process request status to the received data 16 and waits for the processed result data transferred from the CSS server 10 (steps 140 and 141).
- (2) As will be described below, the CSS server

 10 performs the process requested by the client 14 or

 25 entrusts the process to the multimedia server 2. After

 obtaining the data of the processed result, the CSS server

 10 or the multimedia server 2 operates to transfer the data

 to the client 14. The data of the processed result is

divided into N data blocks, and each group of n data units of each data block is transferred back to the client 14 in sequence. The client 14 receives the processed result at each group of n data units (step 142).

5 (3) The process is executed for registering the processed result data received from the CSS server 10 in the harddisk 15 for storing the data set for receive (step 143). The received data status 16 is updated according to the receive status of the processed result data of the client 14 (step 144). Concretely, the data block receive flags for the statuses 48, 49, 50 and the like as shown in Fig. 2 are set, and the status update flag 47 is set as well.

When all n data units contained in one data block

are received, in response to the display request from the
display unit 38, n pieces of data units are displayed on
the screen (steps 146 and 147). In a case that the image
information is displayed, like the playback of a video
disk, for example, the image section at any position is
selectively displayed by specifying an address. Further,
the still playback, the fast feeding or the reversing are
also made possible.

- (4) It is checked if all N data blocks are received. If it is not completed, the process from the 25 step 142 is repeated (step 145).
 - (5) In the check at the step 145, if the receipt of all N data blocks is completed, the process is terminated.

In addition, the client 14 enables to display the received data concurrently with the receipt of each group of n data units.

Next, the description will be oriented to the process executed by the CSS server.

- (6) The CSS server 10 operates to sequentially read the received data statuses 16 and 21 of the client where the client itself sets the process request at the step 141 as referring to the service list 33 (step 148).
- 10 (7) After reading the received data status 16 set by the client 14 for the purpose of the process request at the step 141, the CSS server 10 operates to add the network address 40 dedicated for an input of the CSS server, the network address 41 dedicated for an output of the CSS server, the network address 42 dedicated for an 15 input of the client, the network address 43 dedicated for an output of the client, the process request date 44, the process request time 45, and the process request ID 46, all of which are shown in Fig. 2, to the matrix table 13 for managing the client status as the data items 73 to 79 shown in Fig. 5. If the received data status 16 has no content, the record of the fact is added to the matrix table 13 (step 149).
- (8) By reading the table 35 for each type of 25 process request, it is checked if the request for the process is to be backed up by the multimedia server (steps 150 and 151).

- (9) If it is checked that the request for the process is not to be backed up at the step 151, the process request is determined to be executed by the subject CSS server. In response to the process request from the client 14, the CSS server operates to perform the requested process (step 152).
- (10) It is checked if the process at the step

 152 is terminated within a MAX value 68 of the service time

 of the CSS server in the record set to the table 35 for

 each type of process request shown in Fig. 6 (step 153).
- (11) If in the determination at the step 153 the process at the step 152 is terminated within the MAX value of the service time, the multimedia information created at the step 152 is divided into N data blocks and then are registered as the data set for transmission and receive in the disk 11 (step 154).
- process request ID 79 of the record added to the matrix table 13 for managing the client status at the step 149 is the same as the process request ID 66 contained in the process request table 35, the flag 67 for backing up the record is set, and the process request is determined to be the back-up request, or if in the determination at the step 153, the process at the step 152 is determined not to be terminated within the MAX value of the service time, the CSS server operates to set the process request read from the client to the received data status 12 shown in Fig. 6

and waits for the processed result data transferred from the multimedia server 2 (step 158).

- server 2 performs the process requested by the CSS server 10 and, if the processed result data is obtained, transfers the data to the CSS server 10. The processed result data is divided into N data blocks, and each group of n data units contained in each data block is transferred to the CSS server one group by one group. The CSS server 10 receives the processed result at each group of n data units (step 159).
- registering the processed result data received from the multimedia server 2 in the harddisk 11 for storing the data set for transmission and receive (step 160). Then, the CSS server 10 operates to update the received data status 12 according to the processed result data received status of the CSS server 10 itself (step 161). Concretely, the data block receive flags for the statuses 94, 96, 96 and the like shown in Fig. 6 are set and the status update flag 93 is set as well.

If all n data units are received in one data block at a step 161, the operation goes to a step 155, at which the content of the matrix table for managing the client status shown in Fig. 5 is read.

(15) It is checked that the receipt of all N data blocks is completed. If not completed, the process

from the step 159 is repeated (step 162). If all N data blocks are received, the process is terminated.

- (16) At a step 154 (see Fig. 12), the data of the processed result given by the subject CSS server 10 is registered in the harddisk 11 for storing the data set for transmission and receive. On the termination of the process, the matrix table 13 for managing the client status shown in Fig. 5 is read in sequence (step 155).
- (17) If a transfer completion flag 80 in the

 10 matrix table 13 for managing the client status is set and
 all the receive flags from the first to the N-th data block
 receive flags 81 to 83 are set, the corresponding records
 are deleted from the matrix table 13 for managing the
 client status, and the process is terminated (steps 156 and
 15 157).
- (18) If it is determined that the transfer completion flag 80 is off by referring to the matrix table 13 for managing the client status, the process for transmitting standby data blocks at each group of n data 20 units is executed by repeating the process from the step 155. On the termination of transferring all N data blocks, the transfer completion flag 80 is set (step 163).
- (19) The received data statuses 16 and 21 updated by the client 14 at the step 144 are read in sequence (step 164).
 - (20) The content of the received data status 16 is checked. If the status update flag 47 is set, the matrix table 13 for managing the client status is updated

and if the transfer of the N data blocks is terminated, the transfer completion flag 80 is set. If the flag 47 has been already off, nothing is executed (step 165).

Of the foregoing processes of the CSS server, the processes at the steps 155 to 157 and 163 are executed in parallel to and independently of the processes at the steps 164 and 165.

In turn, the description will be oriented to the process of the multimedia server.

- 10 (21) The multimedia server 2 operates to sequentially read the received data status 12 of the CSS server where the process request is set by the CSS server itself at the step 158 by referring to the service list 34 (step 166).
- 15 The multimedia server 2 operates to read the received data status 12 of the client set by the CSS server 10 for the process request at the step 158 and to add a record composed of the network address 127 dedicated for an input of the multimedia server, the network address dedicated for an output of the multimedia server, the 20 network address 129 dedicated for an input of the CSS server, the network address 130 dedicated for an output of the CSS server, the network address 131 dedicated for an input of the client, the network address 132 dedicated for an output of the client, the process request date 133, the 25 process request time 134, the process request ID (Identification Information) 135 to the matrix table 1 for managing the CSS status shown in Fig. 9. If the received

data status 12 has no content, the record of the fact is added. Then, the update flag 93 is off (step 167).

- (23) In response to the process request issued by the CSS server 10, the multimedia server operates to perform a backup operation, divide the created multimedia information into N data blocks, and register them as a data set for transmission in the disk 3 (steps 168 and 169).
- (24) The multimedia server operates to sequentially read the matrix table 1 for managing the CSS 10 status shown in Fig. 9 updated at the step 167 (step 170).
- (25) If the transfer completion flag 136 contained in the matrix table 1 for managing the CSS status is set and all receive flags from the first to the N-th data block receive flags 137 to 139 are set, the corresponding records are deleted from the matrix table 1, and then the process is terminated (steps 171 and 175).
 - (26) If it is determined that the transfer completion flag 136 is off by referring to the matrix table 1, the process for transmitting the standby data blocks to the corresponding CSS sever 10 at each group of n data units is executed by repeating the process from the step 170. On the termination of all N data blocks, the transfer completion flag 136 is set (step 172).
- (27) The multimedia server operates to
 25 sequentially read the received data status 12 of the CSS server which is updated by the CSS server 10 at the step 161 (step 173).

25

is checked. If the status update flag 93 is set, the multimedia server operates to update the matrix table 1 for managing the CSS status. If the transfer of all N data blocks is completed, the transfer completion flag 136 is off. If the flag 136 has been already off, nothing is executed (step 174).

Of the foregoing processes of the multimedia server, the processes at the steps 170 to 172 are executed in parallel to and independently of the processes at the steps 173 and 174.

In the foregoing embodiment of the invention, the client for issuing the process request is just required to receive the multimedia information from the multimedia server at the address defined on the receive side and set each group of n data units to the address. As mentioned above, the multimedia information is the result processed by the multimedia server. The multimedia information is divided into N data blocks and is transferred at each group of n data units of each data block. Further, the streams of the multimedia information are allowed to be displayed concurrently with when those streams are stored. storage of streams at each group of n data units being received is executed in parallel with and concurrently with the display of one previous received group of n data units. Like the playback of the video disk, the client thus provides a capability of controlling a fast feed, a stop, a reverse, a playback of the multimedia information in real time.

The multimedia server includes a matrix table for managing the process request status and the processed

5 result data received status from the side for requesting the process at each service. When the requesting side operates to set the process request status and the processed result data received status from the requesting side, the multimedia server operates to sequentially read these statuses and set the statuses to the corresponding fields of the matrix table. The multimedia server that is a provider of the service enables to transmit the processed result data to the service such as the CSS server or the client as viewing the status of the matrix table.

15 independently of the update of the matrix table.

Further, according to the embodiment of the invention, the data transfer between the CSS server and the client is made possible like the foregoing operation. The multimedia server, the CSS server, and the client are executing their processed independently of one another while the process request and the processed result data are transferred among the CSS server, the multimedia server, and the client.

As set forth above, according to the present

25 invention, the data of the result processed by the

multimedia server is divided into N data blocks and each

group of n data units of each data block is transferred to

the address defined by the receiving side. The multimedia

server, the CSS server, and the client are thus capable of executing their processes independently of one another.

Hence, the multimedia server, the CSS server, and the client are reduced in scale as securing a response to the request from the client.

In case the multimedia server is coupled to two or more CSS servers or the CSS server is coupled to two or more clients, the system according to the invention can solve the bottleneck in networking between the multimedia server and the CSS servers and between the CSS server and the clients. Further, according to the present invention, only the side for transmitting the processed result data, such as the multimedia server or the CSS server, operates to transmit the data. Hence, the CSS arrangement may be dynamically changed. Besides, even in this case, the present invention offers an effect that the client side does not need any modification.

WHAT IS CLAIMED IS:

- 1. A multimedia information transfer system having a multimedia server and a client server system coupled to said multimedia server through a network and for
- 5 transferring data from said multimedia server to a server and one or more clients included in said client server system, comprising:

said multimedia server having means for storing and reproducing data streams of said multimedia

10 information; and

said client having means for requesting said multimedia server to transfer said data and storing said transferred data and means for displaying said data concurrently with the storage of said data.

- 15 2. A system as claimed in claim 1, wherein said multimedia server has means for dividing said multimedia information into N (N is an integer of 2 or more) data blocks, each of which contains n (n is an integer of 1 or more) data units, and sequentially transferring said
- multimedia information to said server of said client server system on each data block basis, and said client server system has means for transmitting each of said data blocks containing n data units to said client for requesting said server to output said data.
- 25 3. A system as claimed in claim 2, wherein nodes on the network corresponding to said multimedia server, said server of said client server system, and clients include network addresses dedicated for communications,

respectively, said multimedia server and said server of said client server system served as a transmitting side for said multimedia information include matrix tables for managing a receive status and a process request status of said client server system, respectively, and said multimedia server operates to set a request for transferring data from said client server system to a proper field of said matrix table and transfer said data based on said receive status.

- 10 4. A system as claimed in claim 3, wherein said matrix table includes a transfer status area for indicating if the transfer operation of said divided multimedia information is completed and a receive status area for indicating the receive operation of said multimedia
- 15 information, and said status areas are updated each time said transfer and receive operations are executed.
 - 5. A system as claimed in claim 4, wherein the transfer operation of said divided multimedia information from said multimedia server to said server of said client server system is executed independently of the update of the status areas of said matrix table.
 - 6. A system as claimed in claim 4, wherein the transfer operation of said divided multimedia information from said server of said client server system to said
- 25 client is executed independently of the update of the status areas of said matrix table.
 - 7. A system as claimed in claim 2, wherein said divided multimedia information contains N data blocks, each

20

of said data blocks contains an address for identifying the subject data block, and each of n data units contained in each data block has a data address.

- 8. A system as claimed in claim 7, wherein said
 5 multimedia information includes image information, and if
 said image information is transferred from said multimedia
 server to said client, said client operates to specify the
 address for identifying said data block of the stored image
 information and the data address of a specific one of said
 10 data units for the purpose of reproducing said image
 information.
 - 9. A system as claimed in claim 3, wherein said network address dedicated for communication includes one network address dedicated for receive and the other network address dedicated for transmission.
 - 10. A multimedia server for transferring multimedia information to a client server system through a communication network in response to a transfer request for said multimedia information from said client server system, comprising:

means for dividing said multimedia information into N (N is an integer of 2 or more) data blocks, each data block containing n (n is an integer of 1 or more) data units;

25 means for transferring said data blocks to said client server system on each data block basis; and a table having a transfer status area for indicating if a transfer operation of said divided

multimedia information is completed and a receive status area for indicating if a receive operation of said data blocks transferred from said client server system is completed, the transfer operation of said divided multimedia information being executed based on said status information of said table.

11. A client server system containing a server and a plurality of clients coupled to said server and for receiving multimedia information from a multimedia server through a communication network, comprising:

means for receiving said multimedia information composed of plural data blocks at each data block unit and storing said data blocks; and

display means for reproducing and displaying said

multimedia information of said stored data block while the

next data block of said multimedia information is being

received.

- 12. A storage medium for storing a program code read and executed by a computer, comprising:
- a first section for storing a program code for dividing multimedia information into N (N is an integer of 2 or more) data blocks, each data block containing n (n is an integer of 1 or more) data units in response to a transfer request for multimedia information from said client server system;

a second section for storing a program code for transferring said data blocks to said client server system

at each data block unit based on status information stored in a table; and

a third section for storing a program code for generating transfer status information for indicating if a transfer operation of said divided multimedia information is completed, receiving receive status information for indicating if a receive operation of said data blocks transmitted from said client server system is completed, and storing said transfer and receive status informations in a table.

13. A storage medium for storing a program code read and executed by a computer, comprising:

a first section for storing a program code for receiving multimedia information composed of plural data blocks transmitted from a multimedia server at each data block unit and storing said data blocks;

a second section for storing a program code for reproducing and displaying the multimedia information composed of said stored data block while the multimedia information of the next data block is being received; and

a third section for storing a program code for generating receive status information for indicating if a receive operation of said data blocks is completed and transmitting said receive status information to said

25 multimedia sever.

20

ABSTRACT OF THE DISCLOSURE

A multimedia information transfer system includes a multimedia server and a client server system coupled with the multimedia server through a communication network and transfers data transmitted from the multimedia server to a server of the client server system. The multimedia server stores data streams of the multimedia information and reproduces the information. The client requests the multimedia server to transfer data, stores the transferred data block and displays the stored data block concurrently with the storage of the next coming data block.

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

Applicant:

Tomonobu SATO

Serial No.:

NEW

Filed:

September 21, 2000

For:

SYSTEM FOR TRANSFERRING MULTIMEDI

INFORMATION

Group Art Unit: Not assigned

Examiner:

Not assigned

LETTER SUBMITTING FORMAL DRAWINGS

Assistant Commissioner for Patents Washington, DC 20231

September 21, 2000

Sir:

Attached are 12 sheets of formal drawings illustrating FIGS.

1-13 in connection with the above-identified application.


Respectfully submitted,


ANTONELLI, TERRY, STOUT & KRAUS, LLP


Hung H.

Req. No. 40,415

(703) 312-6600 HHB:rk

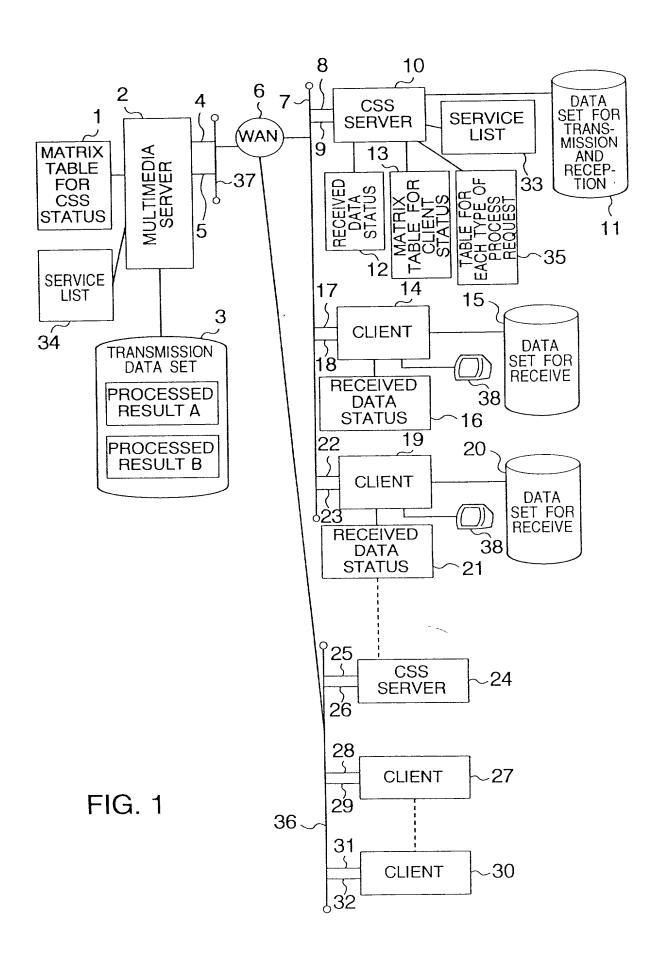



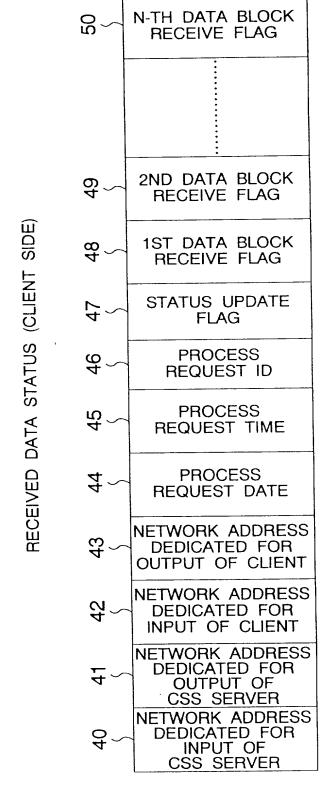

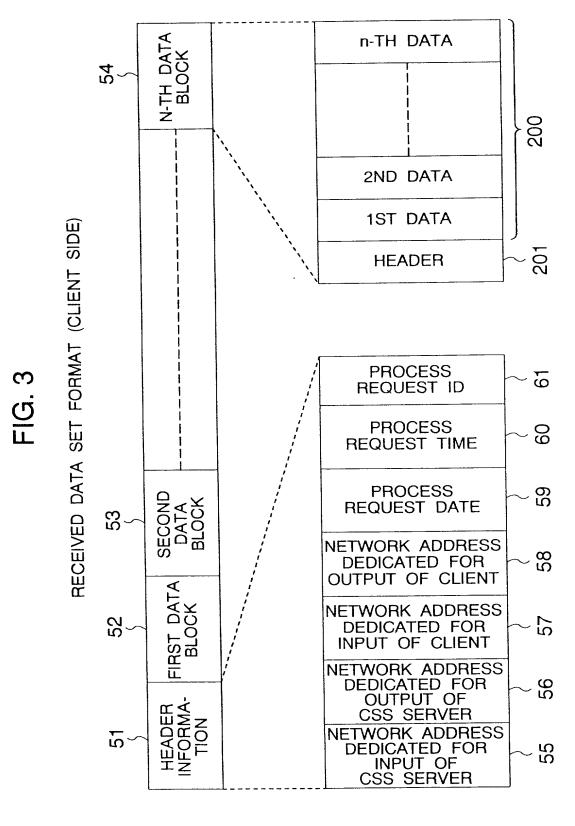


FIG. 4

TABLE FOR EACH TYPE OF PROCESS REQUEST

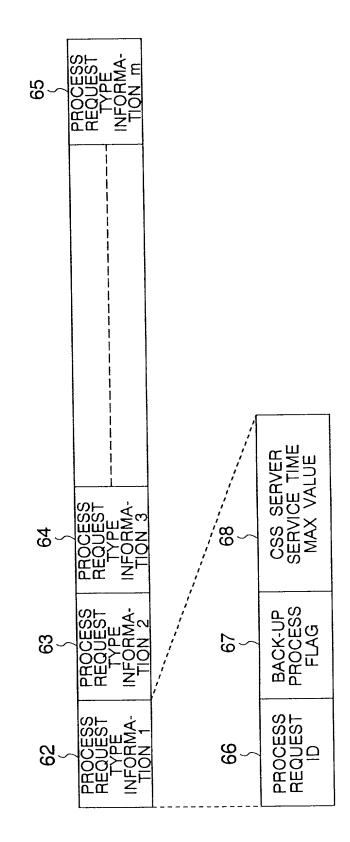


FIG. 5

N-TH DATA BLOCK 83 RECEIVE FLAG SECOND DATA **BLOCK RECEIVE** MATRIX TABLE FOR MANAGING CLIENT STATUS ,FLAG FIRST DATA **BLOCK RECEIVE** $\overline{\omega}$ **FLAG** TRANSFER 80 COMPLETION FLAG **PROCESS** 79 REQUEST ID **PROCESS** 78 REQUEST TIME **PROCESS** REQUEST DATE NETWORK ADDRESS 9/ DEDICATED FOR OUTPUT OF CLIENT 2 **NETWORK ADDRESS** 75 DEDICATED FOR INPUT OF CLIENT NETWORK ADDRESS DEDICATED FOR OUTPUT OF CSS SERVER NETWORK ADDRESS DEDICATED FOR INPUT OF CSS SERVER 69 73


FIG. 6


SIDE)


SERVER

DATA STATUS (CSS

RECEIVED

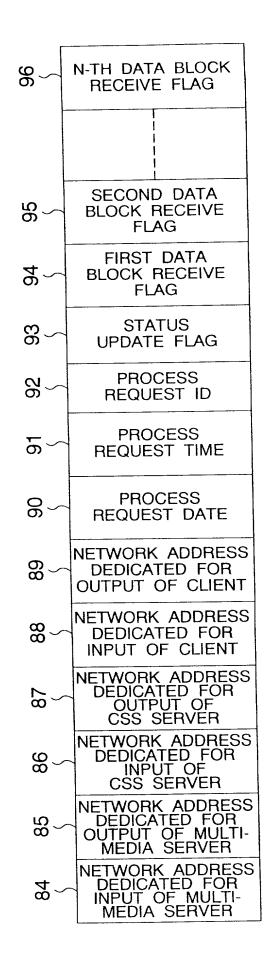

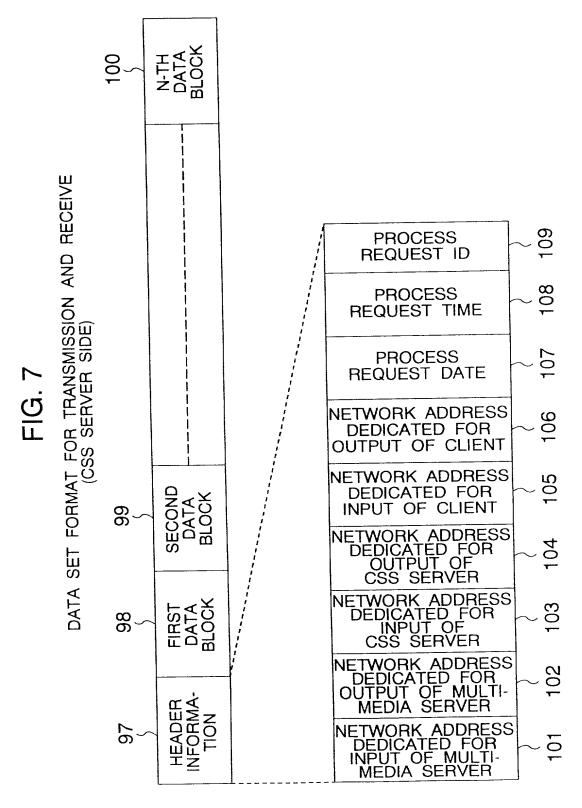

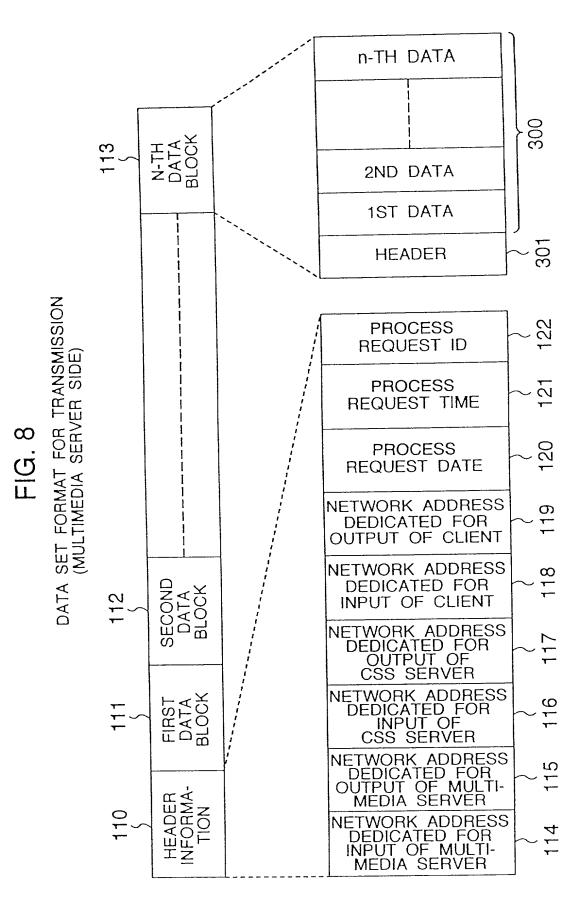

NOL SECOND DATA 38 **BLOCK RECEIVE FLAG** FIRST DATA က် **BLOCK RECEIVE FLAG** STATUS TRANSFER 36 COMPLETION **FLAG** TABLE FOR MANAGING CSS (MULTIMEDIA SERVER SIDE) S **PROCESS** ഗ REQUEST ID 34 **PROCESS** REQUEST TIME 33 **PROCESS** REQUEST DATE NETWORK ADDRESS 32 DEDICATED FOR OUTPUT OF CLIENT MATRIX **NETWORK ADDRESS** 31 DEDICATED FOR INPUT OF CLIENT NETWORK ADDRESS DEDICATED FOR OUTPUT OF CSS SERVER 30 NETWORK ADDRESS DEDICATED FOR INPUT OF CSS SERVER 24 29 NETWORK ADDRESS DEDICATED FOR OUTPUT OF MULTI-MEDIA SERVER 28 NETWORK ADDRESS DEDICATED FOR INPUT OF MULTI-MEDIA SERVER

127

N-TH DATA BLOCK RECEIVE FLAG

FIG. 10

SERVICE LIST (CSS SERVER SIDE)







FIG. 11

SERVICE LIST (MULTIMEDIA SERVER SIDE)



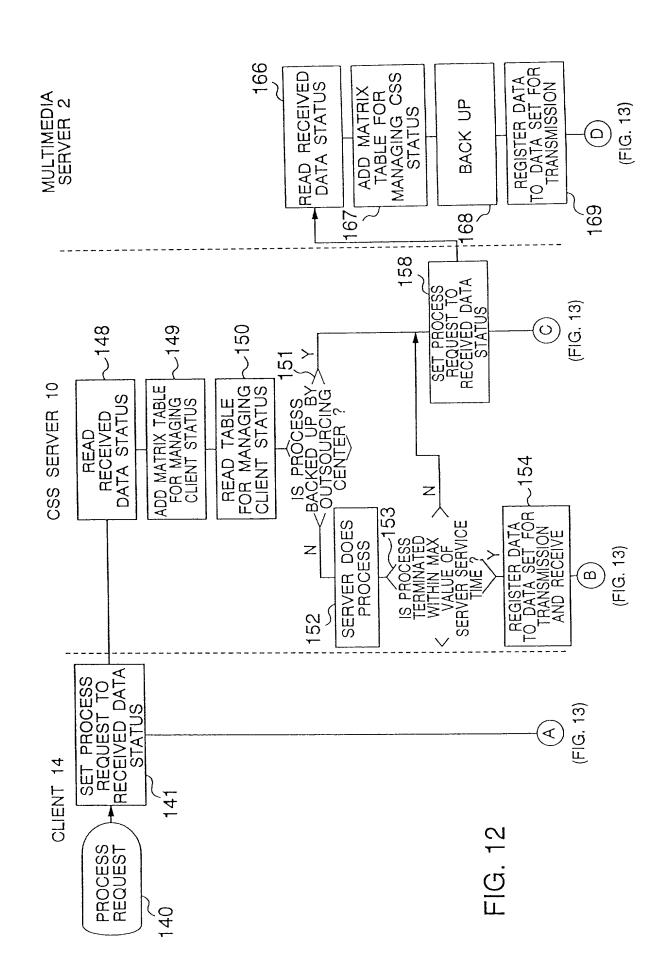

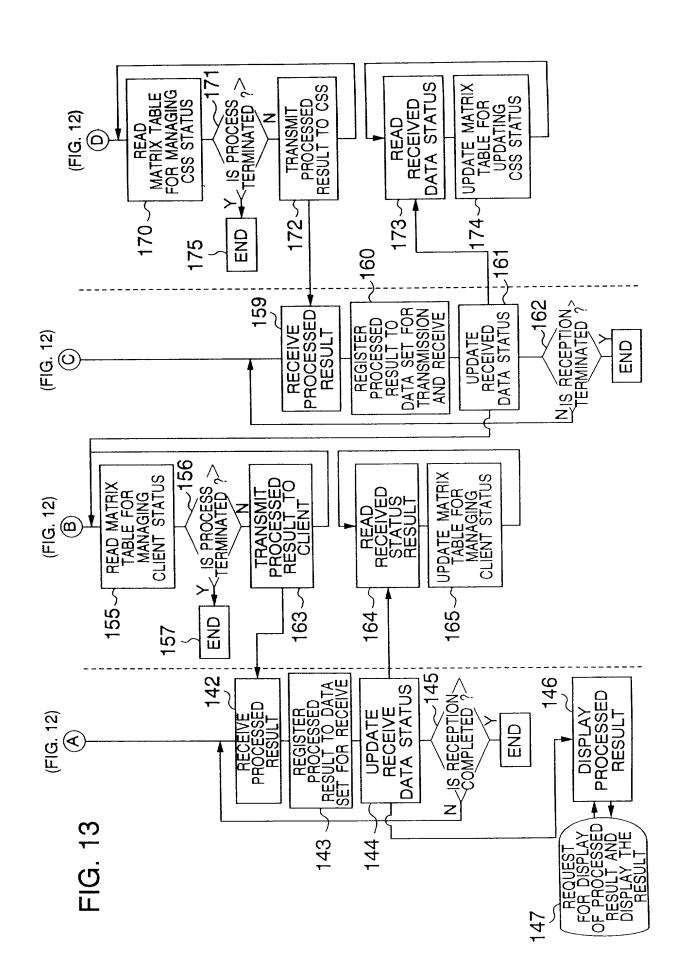

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

Applicant:

Tomonobu SATO

Serial No.:

NEW

Filed:

September 21, 2000

For:

SYSTEM FOR TRANSFERRING MULTIMEDI

INFORMATION

Group Art Unit:

Not assigned

Examiner:

Not assigned

REQUEST FOR APPROVAL TO AMEND DRAWINGS

Assistant Commissioner for Patents Washington, DC 20231

September 21, 2000

Sir:

Please amend FIGS. 1, 8, and 12 as indicated in red on the attached copies. These drawing corrections were approved in parent Application Serial No. 08/862,365, filed May 23, 1997, and are reflected in the formal drawings being filed concurrently herewith.

Respectfully submitted,


ANTONELLI, TERRY, STOUT & KRAUS, LLP


Hung'H. Byli


Reg. No. 40,415

(703) 312-6600

HHB:rk

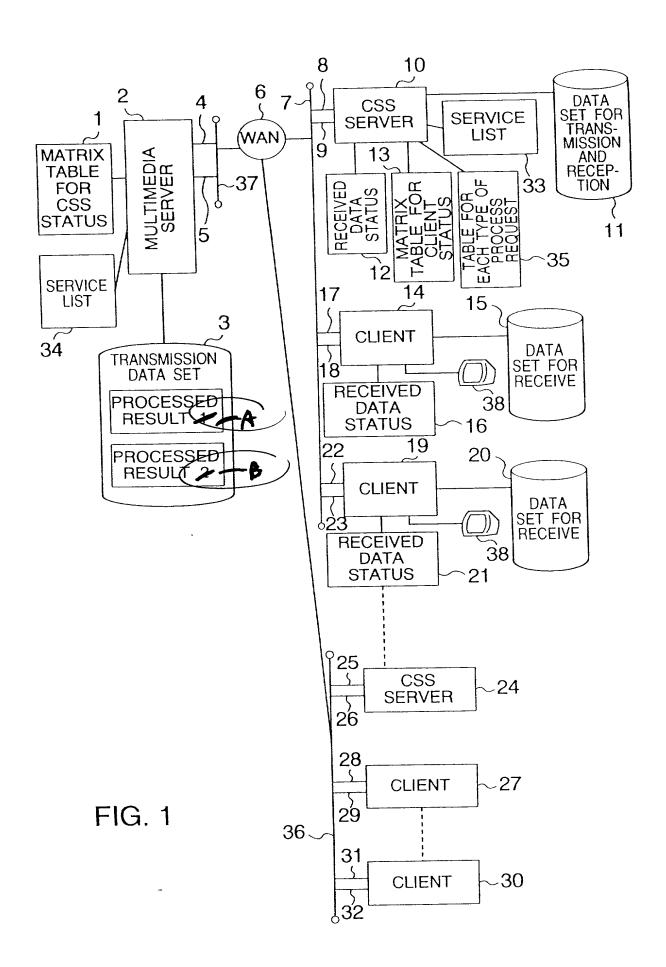

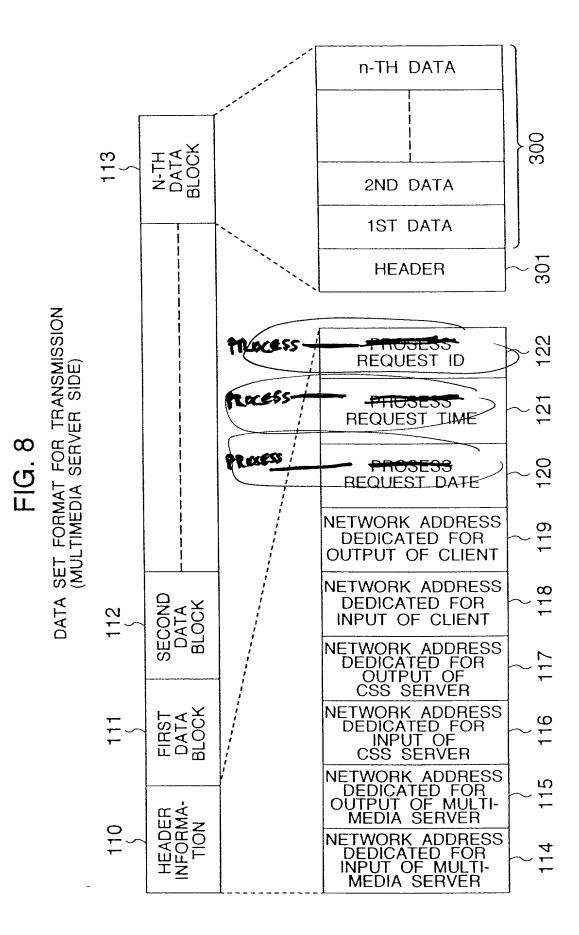

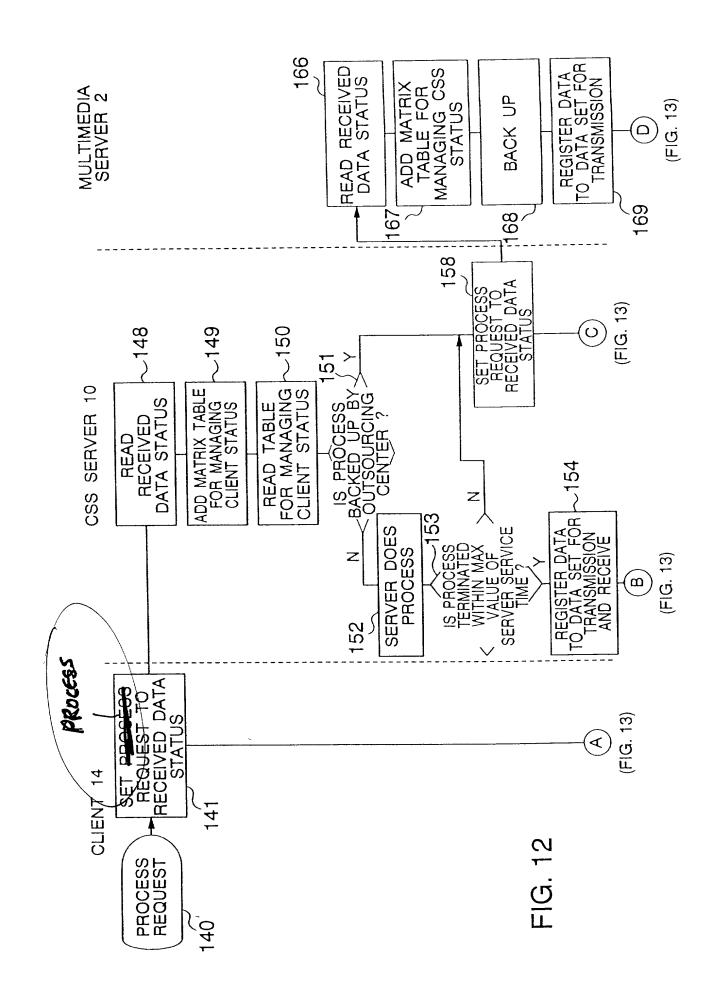

(米)

DECLARATION AND POWER OF ATTORNEY FOR PATENT APPLICATION

(0)124

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name. I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled:

"SYSTEM FOR TRANSF	ERRING MULTIMEDIA	A INFORMATION"		
the specification of which (check one	z) X is attached he	reto.		
	was filed on .			
	as Application	n Senal No.		
	and was amen	ided on(if applicable)		
I hereby state that I have	raviay ad and understand the	contents of the above-identified sp	sectionmen including th	
claims, as amended by any amendmen	nt referred to above.			
I acknowledge the duty to with Title 37. Code of Federal Regul:		material to the examination of this	application in accordanc	
I hereby claim foreign pric patent or inventor's certificate listed certificate having a filing date before	d below and have also identi			
Prior Foreign Application(s)			Priority Claimed	
08-133651	Japan	28 May, 1996	x	
(Number)	(Country)	(Day/Month/Year Filed)	Yes No	
(Number)	(Country)	(Day/Month/Year Filed)	Yes No	
(Number)	(Country)	(Day/Month/Year Filec)	Yes No	
(Number)	(Country)	(Day/Month/Year Filed)	Yes No	
(Number)	(Country)	(Dav/Month/Year Filed)	les 10	
(Number)	(Country)	(Day Month Year Flied	\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\	
I hereby claim the benefit is and, insofar as the subject matter of in the manner provided by the first pinformation as defined in Title 3T. Capplication and the national or PCT is (Application Sena; No.)	leach of the claims of this app paragraph of Title 35. United S Jode of Federal Regulations	tates Code, §112 Tacknowledge in §1 56(a) which occurred between	United States application during to disclose matern the filing date of the pro-	
(Application Senal No.)	(Filing Date)	(Status patented per	(Status potented pending, anandoned)	
(Application Serial No.)	(Filing Date)	(Status patented pe	ncing, abanconed)	

(Filing Date)

(Application Serial No.)

(Status: patented, pending, abandoned)

(Signature)

I hereby appoint as principal attorneys; Donald R. Antonelli, Reg. No. 20,296; David T. Terry, Reg. No. 20,178; Melvin Kraus, Reg. No. 22,466; Stanley A. Wal, Reg. No. 26,432; William I. Solomon, Reg. No. 28,565; Gregory E. Montone, Reg. No. 28,141; Ronald J. Shore, Reg. No. 28,577; Donald E. Stout, Reg. No. 26,422; Alan E. Schiavelli, Reg. No. 32,087; James N. Dresser, Reg. No. 22,973 and Carl I. Brundidge, Reg. No. 29,621 to prosecute and transact all business connected with this application and any related United States application and international applications. Please direct all communications to the following address:

> Antonelli, Terry, Stout & Kraus **Suite 1800** 1300 North Seventeenth Street Arlington, Virginia 22209 Telephone: (703) 312-6600 Fax: (703) 312-6666

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further, that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United State Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon. (Full Name)

Date May 16, 1997 Inventor	Tomonobu SATO TOMOBU SATO
Residence Yokohama-shi, Japa	n Citizenship Japan
	ho, Izumi-ku, Yokohama-shi, Japan.
Date Inventor	-
Residence	Citizenship
DateInventor	
Residence	Citizenship
Post Office Address	
DateInventor	
Residence	Citizenship
Post Office Address	
DateInventor	
Residence	Citizenship
Post Office Address	
DateInventor	
Residence	Citizenship
Post Office Address	
DateInventor	
Residence	C.t.zenship
Post Office Acdress	
DateInventor	
Residence	Citizenship
Post Office Acdress	
Date Inventor	
Residence	Citizenship
Post Office Address	
DateInventor	
Residence	Citizenship
Post Office Address	